


To whom it may concern;

Product Specification

1. Product Name: #234WS Slit harness tape

2. Adhesive Tape Structure

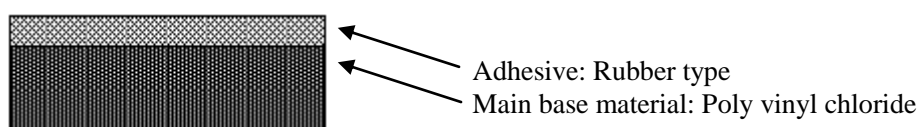

3. Specifications

Nominal Dimension		
Thickness (mm)	Width (mm)	Length (m)
0.13	10	20

4. Standard Color

Black	Gray	Blue	White	Green	Brown
-------	------	------	-------	-------	-------

5. Performance Data

Property	Specification	Testing Method
Thickness (mm)	0.13 ± 0.02	JIS Z 0237:2000
Width (mm)	10 ± 1.0	JIS Z 0237:2000
Length (m)	20 or larger	JIS Z 0237:2000
Slit depth (mm)	1 ± 0.5	-
Number of slits	16 slits on one surface	-
Adhesive strength at 180° peeling angle N/10 mm	0.49 or larger	JIS Z 0237:2000
Tensile strength N/10 mm	15.5 or larger	JIS Z 0237:2000
Elongation %	100 or larger	
Volume resistivity MΩ•cm	1.0 × 10 ⁶ or larger	JIS C 2107-Appendix JA.2
Withstand voltage	Withstanding at 5000V x 1 minutes	JIS C 2107-Appendix JA.1

* The above value (except slit depth and number of slits) measured before slit processing.

6. Instructions for Use and Storage (Precautions)

- When you handle or store product, mind to avoid from direct sunlight or storage in high temperature place.
- Please use product after cleaning and removing stain, dust, moisture or oils on the surface of product.
- When you use product, mind to test the suitability of product for particular purpose or its safety beforehand by yourself and make sure on your own responsibility.