

Prepared Date: 1st October 2017


Denka Company Limited  
Social Life Products Department

To whom it may concern;

## Product Specification

1. Product Name: #246W Flame-retardant harness tape

2. Adhesive Tape Structure

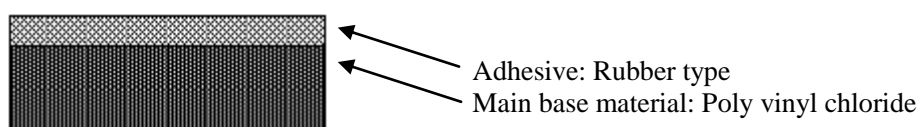

3. Specifications

Nominal Dimension		
Thickness (mm)	Width (mm)	Length (m)
0.11	19 / 25	25

4. Standard Color

Black	-	-	-
-------	---	---	---

5. Performance Data

Property	Specification	Testing Method
Thickness (mm)	$0.11 \pm 0.02$	JIS Z 0237:2000
Width (mm)	$19 \pm 1.0$	JIS Z 0237:2000
	$25 \pm 1.5$	
Length (m)	25 or larger	JIS Z 0237:2000
Adhesive strength at 180°peeling angle N/10 mm	0.49 or larger	JIS Z 0237:2000
Tensile strength N/10 mm	13.4 or larger	JIS Z 0237:2000
Elongation %	100 or larger	JIS Z 0237:2000
Volume resistivity $M\Omega \cdot cm$	$1.0 \times 10^6$ or larger	JIS C 2107-Appendix JA.2
Withstand voltage	Withstanding at 1500V x 1 minute	JIS C 2107-Appendix JA.1
Flame retardance (Oxygen index)	23.5 or larger	JIS K 7201

6. Instructions for Use and Storage (Precautions)

- When you handle or store product, mind to avoid from direct sunlight or storage in high temperature place.
- Please use product after cleaning and removing stain, dust, moisture or oils on the surface of product.
- When you use product, mind to test the suitability of product for particular purpose or its safety beforehand by yourself and make sure on your own responsibility.